


CT1540U9W

INALY 1540U9

SIZE : 19.05 X 44.45MM

PRODUCT DESCRIPTION


- PART NO.: CT1540U9 WET INLAY
- LABEL DIMENSIONS: 19.5 x 44.45mm / .75 x 1.75"
- DISTANCE BETWEEN LABELS: 3.175mm +/- .5mm
- LINER WIDTH: 60mm / 2.36"
- ANTENNA: AL (9µm) + PET (50µm),
Etched Aluminum (9µm) + PET (50µm)
- PROTOCOL: ISO 18000-6C EPC Class1 Gen2
- **CHIP:** NXP / UCODE9
- FREQUENCY +/-5%: 860~960MHz
- OPERATING MODE: Passive
- TYPE OF ADHESIVE: Permanent 945A, general purpose
- OPTIONAL FACE SHEETS: thermal material, transparent films, etc.



PACKAGE SPECIFICATION

1K = 1,000 LABELS

EXTERNAL ROLL DIAMETER	200mm / 7.87"
INNER CORE DIAMETER	76.2mm / 3"
FACE SHEET	PET
BOTTOM MATERIAL	65g Glassine Paper
LABELS PER ROLL	4K
LABELS PER CASE	36K
WEIGHT ROLL	.46kg
WEIGHT CASE	9.2kg
CASE DIMENSIONS	44 x 44 x 16cm / 17.32 x 17.32 x 6.3"

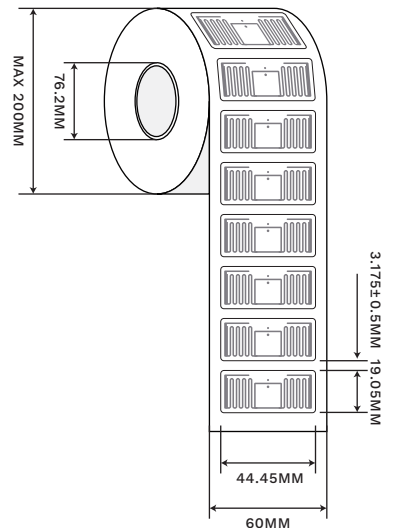

ENVIRONMENT REQUIREMENTS

- Keep dry
- Do not expose to direct sunlight
- Recommended storage temperature: 20-30°C
- Humidity condition: 5-60%
- RF circuits have no expiration date when stored in recommended conditions. However, the adhesive has a useful working life of 1 year from the date of manufacture in anti-static bag at 20-30°C