


CT3050U9D DRY INLAY

SIZE : 30 X 50 M M

PRODUCT DESCRIPTION


- PART NO.: CT 3050U9D DRY INLAY
- LABEL DIMENSIONS: 30 x 50 mm / 1.18 x 1.97" +/- .2MM
- DISTANCE BETWEEN LABELS: 8.1 mm +/- .2MM
- LINER WIDTH: 68MM / 2.67 " +/- .5MM
- ANTENNA: AL (9µm) + PET (50 µm)
ETCHED ALUMINUM (9µm)+ PET (50 µm)
- PROTOCOL: ISO 18000-6C EPC Class1 Gen2
- CHIP: NXP / UCODE9
- FREQUENCY +/-5%: 860~960MHZ
- OPERATING MODE: Passive
- TYPE OF ADHESIVE: Permanent 945A, general purpose

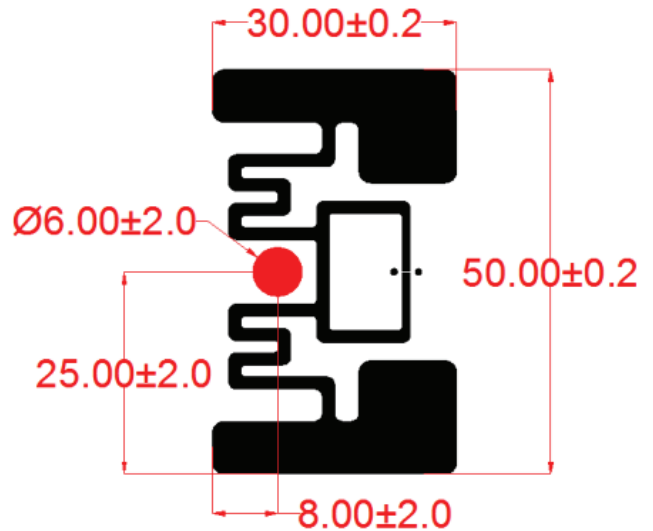

PACKAGE SPECIFICATION

1K = 1,000 LABELS

EXTERNAL ROLL DIAMETER	320mm / 12.60"
INNER CORE DIAMETER	76.2mm / 3"
FACE SHEET	50µm PET
LABELS PER ROLL	15K
LABELS PER CASE	60K
WEIGHT ROLL	4.48kg
WEIGHT CASE	17.95kg
CASE DIMENSIONS	34 x 34 x 34cm / 13.39 x 13.39x 13.39"

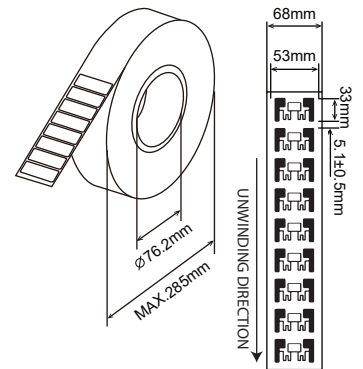

ENVIRONMENT REQUIREMENTS

- Keep dry
- Do not expose to direct sunlight
- Recommended storage temperature: 20-30°C
- Humidity condition: 5-60%
- RF circuits have no expiration date when stored in recommended conditions. However, the adhesive has a useful working life of 1 year from the date of manufacture in anti-static bag at 20-30°C